


AMBOISE, MALACHIT

A1J-36


Einbauventil zur Standmontage 3/4"

THG[®]
PARIS

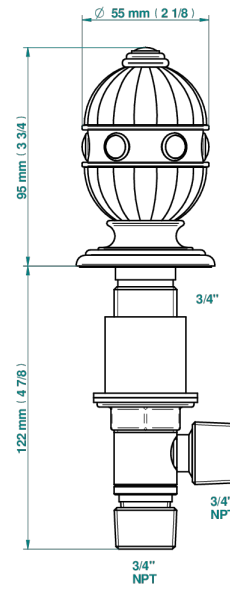


ø de perçage conseillé
recommended drilling ø
empfohlener Abstand
Ø de perforación aconsejado

ø 30 mm (1 1/8 \"



ø 60 mm (2 3/8 \"



29248

26/03/2024

EIGENSCHAFTEN

- Amboise, Malachit
- Einbauventil zur Standmontage 3/4"

VERFÜGBARE OBERFLÄCHEN

Altnickel - H28
Blassgold - F30
Blassgold matt unlackiert - F31
Chrom - A02
Chrom / gold - G02
Chrom matt - C02

Gold - F01
Gold matt - F07
Mattschwarz keramik - D30
Nickel matt - C01
Pvd blush - H62
Pvd blush matt - H60

Pvd bronze braun - F33
Pvd bronze braun matt - F34
Pvd gold - H52
Pvd gold matt - H53
Pvd graphite - H64
Pvd graphite matt - H65

Pvd messing - H49
Pvd messing matt - H50
Pvd nickel - H55
Pvd nickel matt - H56
Pvd umber - H66
Pvd umber matt - H67

Silbernickel - B01