


CAMELIA, KRISTALL KLAR

U5L-50/4/VG


2-wege-umstellventil wanne/brause zur standmontage

THG[®]
PARIS

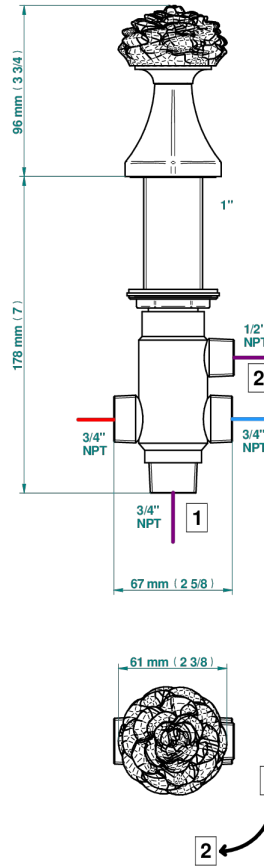

ø de perçage conseillé
recommended drilling ø
emploñener Abstand
Ø de perforación aconsejado

Ø 35 mm (1 3/8")



80795

18/01/2024

EIGENSCHAFTEN

- Camélia, Kristall klar
- 2-wege-umstellventil wanne/brause zur standmontage

VERFÜGBARE OBERFLÄCHEN

Altnickel - H28
Blassgold matt unlackiert - F31
Chrom - A02
Chrom matt - C02
Gold - F01
Gold matt - F07

Mattschwarz keramik - D30
Nickel matt - C01
Pvd blush - H62
Pvd blush matt - H60
Pvd bronze braun - F33
Pvd bronze braun matt - F34

Pvd gold - H52
Pvd gold matt - H53
Pvd graphite - H64
Pvd graphite matt - H65
Pvd messing - H49
Pvd messing matt - H50

Pvd nickel - H55
Pvd nickel matt - H56
Pvd umber - H66
Pvd umber matt - H67
Silbernichel - B01